


# COATINGS MAKING RURNITURE OFILIXURY YACHIS

To guide the choice of the dreams yacht,

there is only one lighthouse.

Beauty.

Leading to a successful image and an unmatchable style.

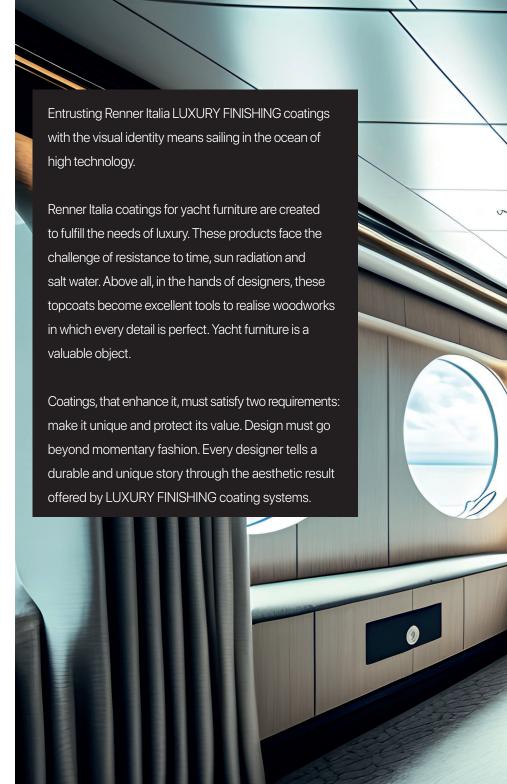







## LUXURY FINSHING RANGE

A range that includes solutions capable of protecting and indulging in the creativity of designers. These coatings can be easily applied and can fill deep, wide and irregular pores, make even the less compact substrates, prevent gloss loss and colour variation.



PREMIUM RANGE



COLOUR STABILITY



RESISTANCE TO SOLAR RADIATION



RESISTANCE TO TEMPERATURE VARIATIONS



ANTI-NAIL POLISHING

## PE coating system

Thanks to the use of a special sealer, this coating system resists against the degrading action of light. It enhances the colour and the substrate texture. It maintains the gloss level over time.

### FI N008 SEALER

It wets and adheres to surfaces with precision. It brightens up the colours. Specifically created for precomposed veneers, typical of nautical manufacture. It prevents white pores formation as well as reduces to the minimum the loss of gloss level wherever the substrate is not very stable or it is subject to stressful environmental conditions. The application from 2 to 4 coats is recommended.

#### PL M006 BASECOAT

It ensures excellent of flow and transparency. It is resistant to the passing of time and maintains the gloss level over time.

### JB M671 TOPCOAT

It stands out for the very high gloss aesthetics, the ultra-fast drying and the high solid content. It grants excellent results even if applied in a warm and humid environment. Dilution is not necessary. A solution of AF M900 absorber (1–5%) can be added, to increase light fastness.





## Acrylic coating system

Superior performances in terms of resistance to light and to colour variation thanks to the use of a unique super product.

### JO 03C489/UVABS SELF-SEALER

Gloss level: 3 gloss. Particularly suitable for application by spray and+C42 curtain coater, even if applied directly on open pore.

Depending on the specific needs, it can be applied in 1, 2 or 3 coats directly on bare wood. Interval between coats is from 1 to 12 hours.

### WB - SB mixed coating system

Maximum resistance to light and to nail polishing. A minimalist design with great duration expectancy: the coating is there, it protects the substrate, but it is not visible.

#### YL R755 BASECOAT

Water-based product, that can be applied by spray gun and roller coater. It can be overcoated after 4 hours with solvent-based products. It accurately removes the wetting effect and gives the surfaces a exquisite natural effect.

### JO 03C489/UVABS SELF-SEALER

### JO xxM100 TOPCOAT

An amazing anti-nail polishing solution. It grants a high build and a strong barrier against yellowing or colour variations. Suitable for application by curtain coater, also on open pore. Available in 5, 10 and 90 gloss versions (the last one to be used as a binder).

**EXTRA:** in combination with JL M100 basecoat, JO xxM100 topcoat creates an acrylic toughened coating system.



